




LUMINOUS INTENSITY DISTRIBUTION

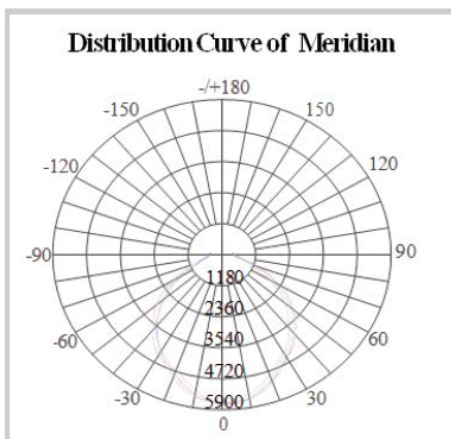

**Dimensions:**  
L300\*W203\*55mm

ThinkLite's Driverless IP67 rated flood lights are the industry's most efficient lighting solutions. Producing light at 93+ CRI, the light spread is crisper and clearer than any other solutions in the market. The internal reflector has an oxide polishing which maximizes the light output at a lower wattage.

**FEATURES**

- Reduced energy consumption by 50%
- Instant on / off
- Longer lifespan (50,000 hours)
- IP67 Rated
- 5 year warranty

**CERTIFICATIONS**



**SPECIFICATIONS**

|                         |                                    |
|-------------------------|------------------------------------|
| Input Voltage:          | 180V - 260V                        |
| Input Frequency:        | 50Hz - 60Hz                        |
| Lumen Efficacy:         | 140 LM/W                           |
| Wattage & Light Output: | 50W: 7,000 Lumens                  |
| Power Factor:           | >0.99                              |
| Kelvin Options:         | 6000K                              |
| CRI:                    | 93+                                |
| Lumen Maintenance:      | 95% at 50,000 hours                |
| Operating Temperature : | -35°C to 55°C                      |
| Fixture Gross Weight:   | 3.5 Kgs                            |
| Body Material:          | High-Pressure Die-Casting Aluminum |
| Reflector Material:     | High-Pure Mirror Surface Aluminum  |